




Autocentranti ad alta precisione Ø500 - 630 - 800 mm


senza passaggio barra	dentatura in pollici
3 griffe	incastro a croce

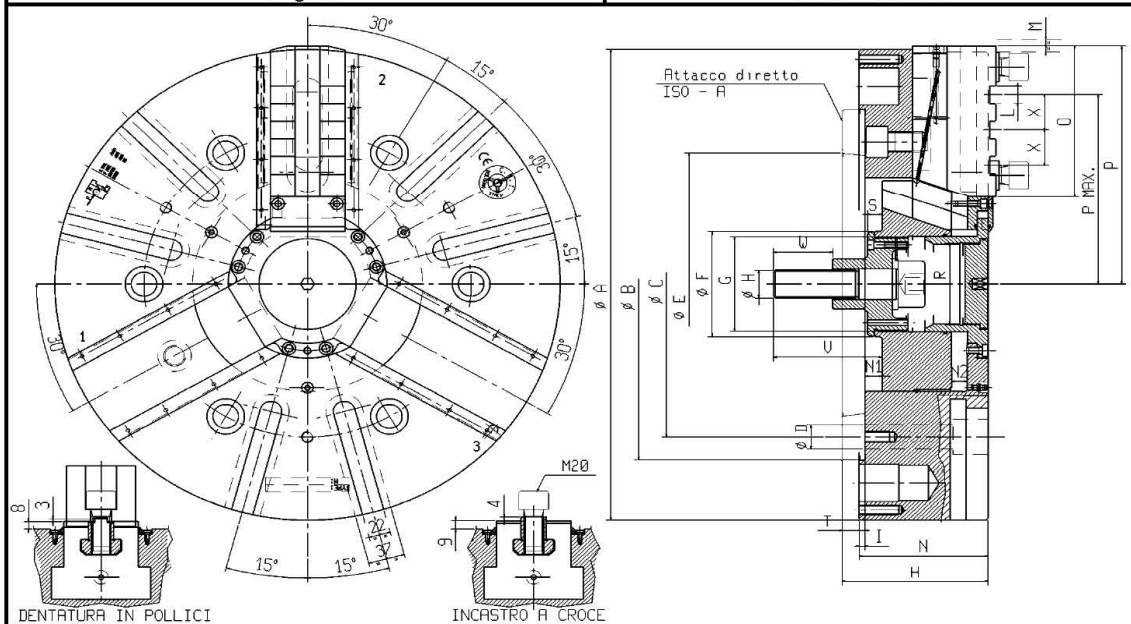

Serie	GR500-3 GRIFFE POLLICI	GR630-3 GRIFFE POLLICI	GR800-3 GRIFFE POLLICI
GR	GR500-3 GRIFFE INC. A CROCE	GR630-3 GRIFFE INC. A CROCE	GR800-3 GRIFFE INC. A CROCE

Attacco	FLANGIA	ISO ASA15"	FLANGIA	ISO ASA15"	FLANGIA	ISO ASA15"
A		510		630		800
B/E H6	380	285.775	380	285.775	380	285.775
C		330.2		330.2		330.2
D		25		25		25
F		114		114		114
H		M30		M30		M30
G		M102x2		M102x2		M102x2
N/H	130	147	150	167	150	167
R		68		68		68
* P ₁		265		321		408
* P _{MAX.}		212		250		352
V		110		110		110
M		13		15		15
W		60		60		60
S		15		15		15
I/T	6	23	6	23	6	23
O		164		220		307
N1/N2		17.5/15.5		20/18		20/18
L H7		19.03		19.03		19.03

T	TIPO	UNITA'	GR500-3 GRIFFE	GR630-3 GRIFFE	GR800-3 GRIFFE
D E C A N T I C I	Forza massima applicabile	daN	12000	12000	12000
	Forza totale di serraggio	daN	21500	21500	21500
	Velocità massima	g/min	1400	1000	800
	Momento d'inerzia	Kg.m ²	4,2	10,8	23,8
	Massa (senza morsetti)	Kg	130	220	320

 **Dati riferiti con mandrino in posizione di metà corsa**
*** Dati riferiti con mandrino in posizione di apertura**