




## SERIE: **GTB**

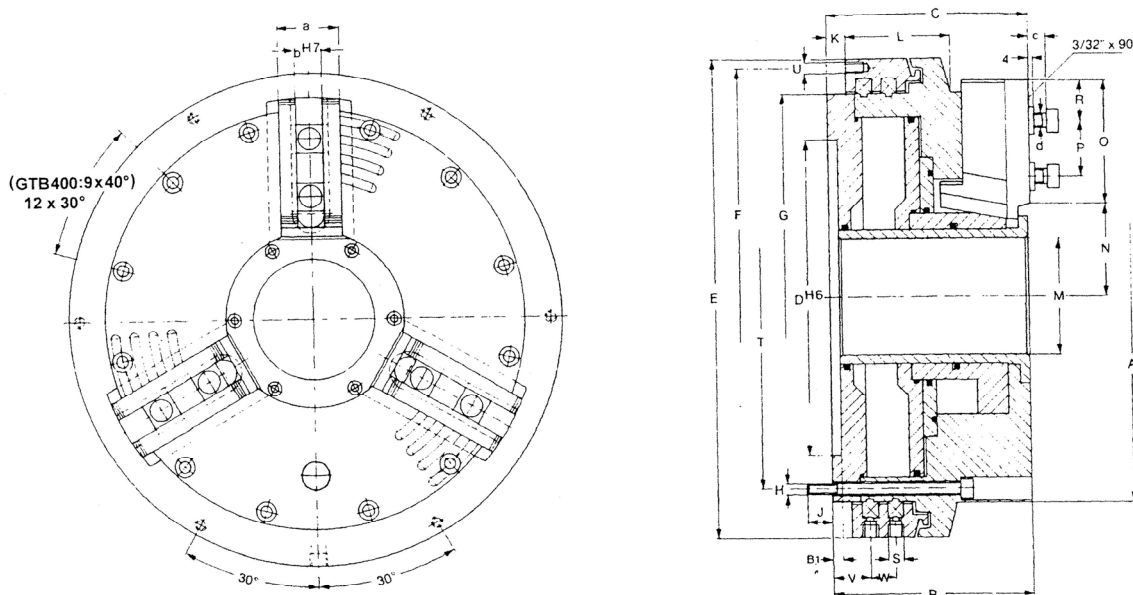

TIPO / Size	GTB 400		GTB 500			GTB 630		GTB 800		GTB1000	
H6	A	400 422	500	540	570	630	662	800	800	1000	
	B	194.5	223			261		303		327	
	B1	8	8			8		8		10	
	C	196.5	225			263		305		329	
	D	310	415			510		700		700	
	E	467	570			685		850		850	
	F	448	550			666		830		830	
	G	400	500			610		775		775	
	H	M 12	M 12			M 16		M 16		M 24	
	J	25.5	27			40		27		25	
	K	20	20			19.5		25		60	
	L	101	105			131.5		124		-	
	M	115 140	160	205	230	265	310	365	410	534	
	Max	N	90 103.3	121	144	154	185	200	243	255	324
Max / Min	O	115	136			140		170		185	
	P	91 / 38	107 / 38			117 / 47		144 / 47		148 / 47	
Min	R	10	10			12		12		12	
	S	R 3/8"	R 3/8"			R 3/8"		R 3/8"		R 3/8"	
H7	T	374	474			580		745		640	
	U	6 x M 8 e 6 x 5/16"-18 UNC									
	V	37	37			39		44.5		79.5	
	W	26	26			33		33		33	
	a	57	57			75		75		75	
	b	25.5	25.5			30		30		30	
	c	28	28			32		32		32	
	d	M 18 (3/4"-10 UNC)					M 24 (1"-8 UNC)				
	PRESSIONE MASSIMA	bar	10		10			10		10	
	Max. operating pressure	daN	17000	16000	25000	21000	19000	28000	22000	36500	33300
SERRAGGIO A 6 BAR	Clamping force at 6 bars										
VELOCITA' MASSIMA IN RPM	min	1700		1300			1000		750		450
Max RPM* with top jaws	kgm <sup>2</sup>	3.46	4.6	8.26	9.56	9.44	25.1	28.05	68.1	65.65	157.43
MOMENTO DI INERZIA	litr	3.2	3	4.9	4.2	3.8	6	5.2	10	9	5.2
Moment of inertia w/o top jaws	mm	7		8.5			10		12		12
CONSUMO D'ARIA A 6 BAR	kg	160	155	250	260	270	430	390	715	690	980
Air consumption / Jaw stroke at 6 bars		7		8.5			10		12		12
CORSA GRIFFE		7		8.5			10		12		12
Jaw stroke		7		8.5			10		12		12
PESO SENZA MORSETTI		7		8.5			10		12		12
Weight without jaws		7		8.5			10		12		12

\* Attenzione: nel GTB 1000 rif. posizioni T e H = Viti non frontali